































INSERTS





















BRISTOL DX

GAS STOVE



Bristol featured in Brown Majolica Enamel.

EFFICIENT PERFORMANCE WITH PANORAMIC THREE-SIDED VIEWING

The Bristol DX offers innovation and efficiency. Panoramic 3-sided viewing allows you to enjoy the flames from any angle. Control the room temperature, adjust the flame height, enable the blower ... with the Bristol DX, you can control your stove and comfort level, with simply the touch of a button.











Bristol featured in Basil Majolica Enamel


BRISTOL DX 8762 FEATURES AND BENEFITS

- 3-sided viewing enjoy the flames from any angle
- Ceramic logs and burner realistic flame presentation
- 2-stage burner turn the front burner on/off and modulate the
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Smart remote features remote thermostat, smart thermostat, 10-level flame control, 5-speed fan control, pilot control and child
- Intermittent pilot conserves gas when unit is off
- · Cast iron heat exchanger maximizes heat output and im-
- **Direct-Vent technology –** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS

Heater Rated Appliance	.AFUE Certified
Heats up to	.1,800 sq ft
Burn Rate Range NG	. 16,000 - 36,000 BTUs/hr
Burn Rate Range LP	. 10,000 - 33,000 BTUs/hr
Venting	.Top, 4" x 6-5/8" DV
Ignition System	.ProFlame II Intermittent pilo
Burner	.2-Stage Ceramic Burner
On-Off-Remote Switch	. Included
Smart Remote Control	. Included
Convection Blower	.Included
Screen	.Included
LP Conversion Kit	. Optional
Mobile Home Certified	.Yes
Actual Weight	.180 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS



STERLING HT

GAS STOVE



Sterling featured in Brown Majolica Enamel with Autumn Brown Granite.

A CENTERPIECE FOR CREATING **GENEROUS WARMTH IN YOUR HOME**

A powerful heater, the Sterling will heat your midsize home with ease. The Sterling combines the convenience and efficiency of gas, and the radiant warmth of stone and cast iron. A variable flame lets you control the fire's intensity. Plus, the Sterling offers convenient venting configurations to make installation possible in any space.









Sterling featured in Brown Majolica Enamel with Titanium Pearl



Sterling featured in Matte Black with Aztek Green Marble.

FINISH OPTIONS:





STONE OPTIONS:





Aztec Green Marble


STERLING HT 8532 **FEATURES AND BENEFITS**


- Stone selection customize your stove for any decor
- Ceramic logs and burner realistic flame presentation
- 2-stage burner turn the rear burner on/off and modulate the
- High turn down adjust the flame to meet your desired comfort
- Wall thermostat easy operation
- Continuous pilot maintains a warm firebox for quick starts
- · Cast iron heat exchanger maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	Up to 1,800 sq ft
Burn Rate Range NG/LP	12,000 - 38,000 BTUs/hr
Venting, Top	4" x 6-5/8" DV *
Venting, Rear	4" x 6-5/8" or 5 x 8" DV *
Ignition System	Continuous pilot
Burner	2-Stage Ceramic Burner
On-Off-Thermostat Switch	Included
Wall Thermostat	Included
Programmable Thermostat	Optional
Thermostatic Remote Control	Optional
Convection Blower	Optional
Screen	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Actual Weight	230 lbs
	* starter collar required, order separat

CLEARANCES TO COMBUSTIBLE MATERIALS





CHAMPLAIN

GAS STOVE







Champlain featured in Brown Majolica Enamel.

A COST-EFFECTIVE **ZONE HEATING SOLUTION**

The Champlain direct-vent, gas-fired stove is one of our larger cast iron gas stoves. A cast iron heat exchange system boosts efficiency. The included wall thermostat and optional convection blower let you maintain your room temperature at a preset comfort level.

FINISH OPTIONS:





CHAMPLAIN 8301 **FEATURES AND BENEFITS**


- Ceramic logs realistic flame presentation
- **High turn down –** adjust the flame to meet your desired comfort
- Wall thermostat easy operation
- Continuous pilot maintains a warm firebox for quick starts
- Cast iron heat exchanger maximizes heat output and improves
- **Direct-Vent technology –** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency


SPECIFICATIONS


Heater Rated Appliance	AFUE Certified
Heats up to	. Up to 1,800 sq ft
Burn Rate Range NG	. 21,500 - 35,000 BTUs
Burn Rate Range LP	. 21,500 - 35,000 BTUs
Venting	. 45°, 4" x 6-5/8" DV
Ignition System	. Continuous pilot
Burner	. Pan Burner
On-Off-Thermostat Switch	. Included
Wall Thermostat	. Included
Programmable Thermostat	. Optional
Thermostatic Remote Control	. Optional
Convection Blower	. Optional
Screen	. Included
LP Conversion Kit	. Included
Mobile Home Certified	. Yes
Actual Weight	. 220 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS









TUCSON DX

GAS STOVE



Tucson featured in Brown Majolica Enamel with Autumn Brown Granite.

PERFECTLY SCALED TO COMPLEMENT MOST LIVING ENVIRONMENTS

The Tucson DX model excels in easy, effortless functionality and gives you a variety of features all programmable from our signature remote. Now you can control your stove from the comfort of your sofa with the touch of a button. As beautiful as it is smart, the Tucson DX model is perfectly scaled to complete most living environments.





FINISH OPTIONS:







STONE OPTIONS:







TUCSON DX 8702 **FEATURES AND BENEFITS**


- HeatWave refractory Directs the heat of the flame to the glass, maximizing the radiant heat from the stove.
- Stone selection customize your stove for any decor
- Ceramic logs and burner realistic flame presentation
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Smart remote features remote thermostat, smart thermostat, 5-level flame control, 5-speed fan control, auxiliary outlet and child lock-out
- Intermittent pilot conserves gas when unit is off
- Cast iron heat exchanger maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency


SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	1,200 sq ft
Burn Rate Range NG	18,000 - 26,000 BTUs/hr
Burn Rate Range LP	21,600 - 25,000 BTUs/hr
Venting	45°, 4" x 6-5/8" DV
Ignition System	ProFlame Intermittent pilo
Burner	Ceramic Burner
On-Off-Remote Switch	Included
Smart Remote Control	Included
Convection Blower	Included
Screen	Included
LP Conversion Kit	Optional
Mobile Home Certified	Yes
Actual Weight	155 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS









Note: shown with 45° elbow venting not included

STOWE DX

GAS STOVE



Stowe featured in Oyster Enamel.

EFFICIENT BEAUTY AT ITS BEST

A great model with innovation and efficiency built in! Our Stowe DX gas stove brings you the height of direct-vent technology with the ProFlame electronic ignition system. The HeatWave refractory panel projects heat into the room.







FINISH OPTIONS:











Stowe featured in Brown Majolica Enamel


STOWE DX 8322 **FEATURES AND BENEFITS**

- **HeatWave refractory –** Directs the heat of the flame to the glass, maximizing the radiant heat from the stove.
- Stone selection customize your stove to fit your space
- Ceramic logs and burner realistic flame presentation
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Smart remote features remote thermostat, smart thermostat, 5-level flame control, 5-speed fan control, auxiliary outlet and child lock-out.
- Intermittent pilot conserves gas when unit is off
- Cast iron heat exchanger maximizes heat output and improves efficiency
- **Direct-Vent technology –** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency


SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	1,200 sq ft
Burn Rate Range NG	18,000 - 26,000 BTUs/hr
Burn Rate Range LP	21,600 - 25,000 BTUs/hr
Venting	45°, 4" x 6-5/8" DV
Ignition System	ProFlame Intermittent pilo
Burner	Ceramic Burner
On-Off-Remote Switch	Included
Smart Remote Control	Included
Convection Blower	Included
Screen	Included
LP Conversion Kit	Optional
Mobile Home Certified	Yes
Actual Weight	155 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS







Note: shown with 45° elbow, venting not included.

TRIBUTE DV

GAS STOVE




Tribute DV featured in Brown Majolica Enamel with Autumn Brown Granite.

CLASSIC STONE STYLING & WARMTH

The Tribute's DV's stone and cast iron design distributes heat quickly and evenly, while its cast iron heat exchanger maximizes heating efficiency. An adjustable flame control lets you control the amount of heat. Featuring styling that's complemented by two cast iron finishes and two stone options, the Tribute fits in any home decor.








Autumn Brown Granite

Tribute DV featured in Brown Majolica Enamel with Titanium Pearl stone

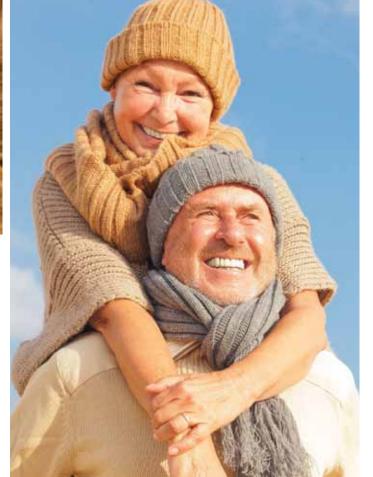

TRIBUTE DV 8050 FEATURES AND BENEFITS

- Stone selection customize your stove for any decor
- Optional rear stones finishes the stove on all sides
- Ceramic logs and burner realistic flame presentation
- Wall thermostat easy operation
- Continuous pilot maintains a warm firebox for quick starts
- Cast iron heat exchanger maximizes heat output and improves efficiency
- **Direct-Vent technology** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS


Heater Rated Appliance	AFUE Certified
Heats up to	Up to 900 sq ft
Burn Rate Range NG	10,600 - 18,000 BTUs/h
Burn Rate Range LP	10,400 - 17,500 BTUs/h
Venting	Rear, 4" x 6-5/8" DV
Ignition System	Continuous pilot
Burner	Ceramic Burner
On-Off-Thermostat Switch	Included
Wall Thermostat	Included
Programmable Thermostat	Optional
Thermostatic Remote Control	Optional
Convection Blower	Optional
Screen	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Actual Weight	185 lbs

 CLEARANCES
 TO COMBUSTIBLE MATERIALS

 Side
 2"

 Rear
 1½"

 Corner
 2"









Bari DV featured in Gray Matte with Soapstone.

SLEEK CONTEMPORARY STYLING

The Bari DV features slim lines that compliment any style. Its cylindrical shape frames a striking flame and takes up less space than traditional rectangular stoves. Providing the radiant heat of soapstone, the Bari maximizes comfort with minimum effort.





BARI DV 8180 FEATURES AND BENEFITS

- 100lbs of soapstone HeatLife: long-lasting warmth
- Space-saving footprint minimizes required floor space
- Ceramic logs realistic flame presentation
- **High turn down –** adjust the flame to meet your desired comfort
- Thermostatic remote features remote thermostat, on/off, and child lock-out
- Continuous pilot maintains a warm firebox for quick starts
- **Direct-Vent technology** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS


Heater Rated Appliance	. AFUE Certified
Heats up to	. Up to 1,300 sq ft
Burn Rate Range NG	. 16,000 - 26,500 BTUs/h
Burn Rate Range LP	. 15,000 - 26,500 BTUs/h
Venting	. Top, 4" x 6-5/8" DV
Ignition System	. Continuous pilot
Burner	. Pan burner
On-Off-Thermostat Switch	. Included
Thermostatic Remote Control	. Included
Programmable Thermostat	. Optional
LP Conversion Kit	. Included
Mobile Home Certified	. Yes
Actual Weight	. 300 lbs


CLEARANCES TO COMBUSTIBLE MATERIALS

 Side
 10"

 Rear
 1"

 Corner
 7"









Modena featured in Charcoal with ceramic fire stone burner.

FIRE PERFECTED FROM EVERY ANGLE

The Modena fire glows from three sides, providing a perfect view from every angle. This stove is designed to reflect the flame with a mirrored effect. The Modena inspires with its consistency in style and clear concept.





MODENA 8140 FEATURES AND BENEFITS


- Ceramic fire stones modern alternative to traditional logs
- Space-saving footprint minimizes required floor space
- **High turn down –** adjust the flame to meet your desired comfort
- Thermostatic remote features remote thermostat, on/off, and child lock-out
- Continuous pilot maintains a warm firebox for quick starts
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS

Heater Rated Appliance	. AFUE Certified
Heats up to	. Up to 1,300 sq ft
Burn Rate Range NG	. 16,000 - 26,500 BTUs/hr
Burn Rate Range LP	. 15,000 - 26,500 BTUs/hr
Venting	. Top, 4" x 6-5/8" DV
gnition System	. Continuous pilot
Burner	. Pan burner
On-Off-Thermostat Switch	. Included
Thermostatic Remote Control	. Included
Programmable Thermostat	. Optional
Ceramic Log Set	. Optional
P Conversion Kit	. Included
Mobile Home Certified	. Yes
Actual Weight	. 320 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS









Luno featured in Black.

DESIGNED TO FIT A MODERN LIFESTYLE

The Luno gas stove is designed to complement modern styling. Made with two semicircular elements, the stove remains slim while presenting a large vertical fire.





LUNO 8160 FEATURES AND BENEFITS


- Space-saving footprint minimizes required floor space
- Ceramic logs realistic flame presentation
- **High turn down –** adjust the flame to meet your desired comfort
- Thermostatic remote features remote thermostat, on/off, and child lock-out.
- Continuous pilot maintains a warm firebox for quick starts
- **Direct-Vent technology** combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	Up to 1,300 sq ft
Burn Rate Range NG	16,000 - 26,500 BTUs/hr
Burn Rate Range LP	15,000 - 26,500 BTUs/hr
Venting	Top, 4" x 6-5/8" DV
Ignition System	Continuous pilot
Burner	Pan burner
On-Off-Thermostat Switch	Included
Thermostatic Remote Control	Included
Programmable Thermostat	Optional
LP Conversion Kit	Included
Mobile Home Certified	Yes
Actual Weight	250 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS

Side	10"
Rear	1"
Corner	7"














DVI- 44 Quinlin featured in Matte Black with 48" surround, burning natural gas.

Quinlan cast iron texture.


with 44" New Bronze surround, burning natural gas.

UNCOMPROMISED TRANSITION OF YOUR FIREPLACE

Eliminate the cold drafts of an open fireplace and lower your utility costs by upgrading to the convenience and efficiency of the DVI-44. The stacked ledgestone refractory radiates the generous heat of the realistic flame, and the integrated convection fan ensures your comfort.









DVI- 38 Coburn featured in Black with 40" surround, burning natural gas.






Easy access: A sliding valve tray allows a qualified gas technician access to the gas components on the right side of the insert.



DVI-38 Quinlin featured in Brown Majolica Enamel with 44" New Bronze surround, burning natural gas.

TRANSFORM YOUR HEARTH

The DVI-38 includes all the features necessary to transform your hearth into an energy efficient heating solution. With a realistic fire and smart remote control, you're sure to enjoy the comfort and convenience of our direct vent gas insert.



DVI-38 GAS INSERT

DVI-44 8860


FEATURES AND BENEFITS


- HeatWave refractory Directs the heat of the flame to the glass, maximizing the radiant heat from the stove.
- Ceramic logs and burner realistic flame presentation
- 2-stage burner turn the rear burner on/off and modulate the flame height
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Smart remote features remote thermostat, smart thermostat, 10-level flame control, 5-speed fan control, light control, pilot control and child lock-out
- · Intermittent pilot conserves gas when unit is off
- Heat exchange system maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency


SPECIFICATIONS


Heater Rated Appliance	AFUE Certified
Heats up to	Up to 2,000 sq ft
Burn Rate Range NG	15,000 - 43,000 BTUs/hr
Burn Rate Range LP	17,000 - 46,000 BTUs/hr
Venting	3" intake, 4" exhaust
Ignition System	ProFlame II Intermittent pilot
Burner	2-Stage Ceramic Burner
On-Off-Remote Switch	Included
Smart Remote Control	Included
Convection Blower	Included
Screen	Included
Ambient Light	Included
LP Conversion Kit	Optional
Mobile Home Certified	Yes
Actual Weight	240 lbs
Minimum Fireplace Opening	35½" W x 26" H x 19" D

CLEARANCES TO COMBUSTIBLE MATERIALS










FACADE OPTIONS FINISH OPTIONS

Matte Black Brown Majolica Ename





SURROUND OPTIONS


MEDIUM SURROUND


LARGE SURROUND

QUINLIN

— 35½" -

LARKIN








DVI-38 8850 **FEATURES AND BENEFITS**


- HeatWave refractory Directs the heat of the flame to the glass, maximizing the radiant heat from the stove.
- Ceramic logs and burner realistic flame presentation
- 2-stage burner turn the rear burner on/off and modulate the flame height
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Smart remote features remote thermostat, smart thermostat, 10-level flame control, 5-speed fan control, auxiliary outlet and child lock-out
- · Intermittent pilot conserves gas when unit is off
- Heat exchange system maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS


Heater Rated Appliance	AFUE Certified
Heats up to	Up to 1,700 sq ft
Burn Rate Range NG	17,000 - 38,000 BTUs/hr
Burn Rate Range LP	16,000 - 38,000 BTUs/hr
Venting	3" intake, 3" exhaust
Ignition System	ProFlame Intermittent pilot
Burner	2-Stage Ceramic Burner
On-Off-Remote Switch	Included
Smart Remote Control	Included
Convection Blower	Included
Screen	Included
Ambient Light	Included
LP Conversion Kit	Optional
Mobile Home Certified	Yes
Actual Weight	200 lbs
Minimum Fireplace Opening	33½" W x 22½" H x 16½" D

CLEARANCES TO COMBUSTIBLE MATERIALS

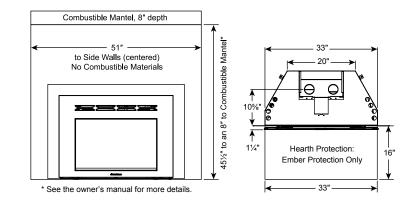


























DVI-HT KILLINGTON


GAS INSERT



FINISH OPTIONS:









DVI-HT Killington featured in Matte Black with small surround.

AN INSTANT STYLE UPGRADE TO YOUR FIREPLACE

Gas-fired and designed to fit perfectly into your fireplace, the Killington features a double heat exchanger that allows less heat up the chimney, more into your house. Adjust the flame height upwards, and the Killington will keep you warm and comfortable. Adjust it down - and enjoy a gentle warmth along with a beautiful flame.





2 surround options: Small 38" x 271/2", Large 44" x 313/4"


DVI HT 8890 FEATURES AND BENEFITS


- Ceramic logs and burner realistic flame presentation
- **High turn down –** adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Wall thermostat easy operation
- Continuous pilot maintains a warm firebox for quick starts
- Cast iron heat exchanger maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency

SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	Up to 1,500 sq ft
Burn Rate Range NG	13,000 - 33,000 BTUs/h
Burn Rate Range LP	12,000 - 33,000 BTUs/h
Venting	3" intake, 3" exhaust
Ignition System	Continuous pilot
Burner	2-Stage Ceramic Burner
On-Off-Thermostat Switch	Included
Wall Thermostat	Included
Programmable Thermostat	Optional
Thermostatic Remote Control	Optional
Convection Blower	Included
Screen	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Actual Weight	185 lbs
Small Surround	38" x 27½"
Large Surround	44" W x 31¾" H
Minimum Fireplace Opening	28½" W x 20" H x 16½"

CLEARANCES TO COMBUSTIBLE MATERIALS





DVI-HT WILLOUGHBY & MAIDSTONE

GAS INSERT



DVI-HT Maidstone featured in Brown Majolica Enamel, small surround with Autumn Brown Granite

UPDATE A ROOM WITH EFFICIENCY AND CHARM

The Maidstone Direct-Vent gas insert turns your fireplace into an efficient heat source. Gas-fired and designed to fit perfectly into your fireplace, the Maidstone features a double heat exchanger that reduces the heat lost up the chimney, so more heat is distributed into your home. With a variable flame, you regulate heat output as you desire.



FINISH OPTIONS:





STONE OPTIONS:





DVI-HT Maidstone featured in Matte Black, small surround



DVI-HT Willoughby featured in Matte Black, small surround with Polished Soapstone.


DVI HT 8890 FEATURES AND BENEFITS

- Stone selection customize your stove for any decor
- Ceramic logs and burner realistic flame presentation
- High turn down adjust the flame to meet your desired comfort
- Built-in convection blower circulates warm air
- Wall thermostat easy operation
- Continuous pilot maintains a warm firebox for quick starts
- Cast iron heat exchanger maximizes heat output and improves efficiency
- Direct-Vent technology combustion air is drawn from outside to reduce drafts, maintain indoor air quality, and boost efficiency


SPECIFICATIONS

Heater Rated Appliance	AFUE Certified
Heats up to	Up to 1,500 sq ft
Burn Rate Range NG	13,000 - 33,000 BTUs/hr.
Burn Rate Range LP	12,000 - 33,000 BTUs/hr.
Venting	3" intake, 3" exhaust
Ignition System	Continuous pilot
Burner	2-Stage Ceramic Burner
On-Off-Thermostat Switch	Included
Wall Thermostat	Included
Programmable Thermostat	Optional
Thermostatic Remote Control	Optional
Convection Blower	Included
Screen	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Actual Weight	185 lbs
Small Surround	425/8" x 265/8"
Large Surround	49¼" W x 32¾" H
Minimum Fireplace Opening	28½" W x 20" H x 16½" D

CLEARANCES TO COMBUSTIBLE MATERIALS

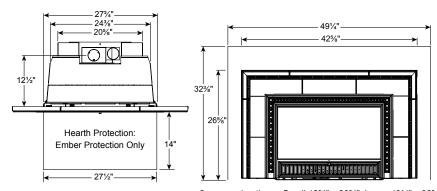

2 surround options: Small 425/8" x 265/8", Large 491/4" x 323/8"



	BRISTOL DX	STERLING HT	CHAMPLAIN	TUCSON DX
SPECIFICATIONS				
Venting	Top, 4" x 65/8"	Top, 4" x 65/8" Rear, 4"x65/8" or 5"x8"	45°, 4" x 65/8"	45°, 4" x 6⁵⁄₅"
Venting: Minimum Vertical Rise	36"	0"	24"	9"
Ignition System	ProFlame II intermittent pilot	Continuous pilot	Continuous pilot	ProFlame intermittent pilot
Burner	2-stage ceramic	Ceramic	Stainless steel pan	Ceramic
On-Off Switch	On-Off-Remote	On-Off-Thermostat	On-Off-Thermostat	On-Off-Remote
Remote Control	Included	Optional	Optional	Included
Wall Thermostat	N/A	Included	Included	N/A
Programmable Thermostat	N/A	Optional	Optional	N/A
Convection Blower	Included	Optional	Optional	Included
Screen	Included	Included	Included	Included
LP Conversion Kit *	Optional	Included	Included	Optional
Mobile-home certified	Yes	Yes	Yes	Yes
Actual weight (lbs)	180	230	220	155
Shipping weight (lbs) (1)	205	260	260	200
PERFORMANCE				
Heating capacity up to (4)	1,800 sq. ft.	1,800 sq. ft.	1,800 sq. ft.	1,200 sq. ft.
Burn Rate Range NG (BTUs/hr)	16,000 to 36,000	12,000 to 38,000	21,500 to 35,000	18,000 to 26,000
Burn Rate Range LP (BTUs/hr)	10,000 to 33,000	12,000 to 38,000	21,500 to 35,000	21,600 to 25,000
Certified steady state efficiency (3)	79% NG 74% LP	81%NG** 86%LP***	77% NG 72% LP	70% NG 77% LP
AFUE (3)	79.4% NG 72.8% LP	70%NG** 72.8%LP**	68.5% NG 65.5% LP	64.6% NG 68.0% LP
P4 EnerGuide efficiency (3)	80.0% NG / LP	74.0% NG / LP	63.1% NG / LP	61.0% NG / LP
CLEARANCES (5)				
Minimum clearance to combustibles				
Side	16"	4"	4"	6"
Rear	2"	2"	2"	2"
Corner	11"	2"	2"	4"

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your stove.

STOWE DX	TRIBUTE DV	BARI DV	MODENA	LUNO
45°, 4" x 65%"	Rear, 4" x 65⁄%"	Top, 4" x 65/8"	Top, 4" x 65/8"	Top, 4" x 65/8"
9"	0"	24"	24"	24"
ProFlame intermittent pilot	Continuous pilot	Continuous pilot	Continuous pilot	Continuous pilot
Ceramic	Ceramic	Stainless steel pan	Stainless steel pan	Stainless steel pan
On-Off-Remote	On-Off-Thermostat	On-Off-Thermostat	On-Off-Thermostat	On-Off-Thermostat
Included	Optional	Included	Included	Included
N/A	Included	Optional	Optional	Optional
N/A	Optional	Optional	Optional	Optional
Included	Optional	N/A	N/A	N/A
Included	Included	N/A	N/A	N/A
Optional	Included	Included	Included	Included
Yes	Yes	Yes	Yes	Yes
155	185	300	320	250
200	210	340	360	290
1,200 sq. ft.	900 sq. ft.	1,300 sq. ft.	1,300 sq. ft.	1,300 sq. ft.
18,000 to 26,000	10,600 to 18,000	16,000 to 26,500	16,000 to 26,500	16,000 to 26,500
21,600 to 25,000	10,400 to 17,500	15,000 to 26,500	15,000 to 26,500	15,000 to 26,500
70% NG 77% LP	77% NG 76% LP	74% NG 76% LP	73% NG 78% LP	77% NG 77% LP
64.6% NG 68.0% LP	73.9% NG 73.1% LP	64.5% NG 66.8% LP	64.6% NG 70.4% LP	76.2% NG 67.4% LP
61.0% NG / LP	63.3% NG 66.3% LP	55.8% NG / LP	55.8% NG / LP	64.3% NG / LP
6"	2"	10"	16"	10"
2"	1½"	1"	1"	1"
4"	2"	7"	11½"	7"

^{*} All products ship ready to burn natural gas.

^{**} Efficiency values with 5" x 8" venting

^{***} Efficiency values with 4" x 65%" venting




	DVI-44 QUINLIN LARKIN COBURN	DVI-38 QUINLIN LARKIN COBURN	
SPECIFICATIONS			
Venting	3" intake, 4" exhaust	3" intake, 3" exhaust	
Ignition System	ProFlame II intermittent pilot	ProFlame intermittent pilot	
Burner	2-stage ceramic	2-stage ceramic	
On-Off Switch	On-Off-Remote	On-Off-Remote	
Remote Control	Included	Included	
Wall Thermostat	N/A	N/A	
Programmable Thermostat	N/A	N/A	
Convection Blower	Included	Included	
Screen	Included	Included	
Ambient Light	Included	Included	
LP Conversion Kit *	Optional	Optional	
Mobile-home certified	Yes	Yes	
Actual weight (lbs)	240	200	
Shipping weight (lbs) (1)	280	240	
PERFORMANCE			
Heating capacity up to (4)	2,000 sq. ft.	1,700 sq. ft.	
Burn Rate Range NG (BTUs/hr)	15,000 to 43,000	17,000 to 38,000	
Burn Rate Range LP (BTUs/hr)	17,000 to 46,000	16,000 to 38,000	
Certified steady state efficiency (3)	73% NG 76% LP	73% NG 74% LP	
AFUE (3)	66.2% NG 68.5% LP	66.9% NG 65.3% LP	
P4 EnerGuide efficiency (3)	69.6% NG / LP	71.2% NG / LP	
CLEARANCES (5)			
Minimum Mantel Height (8" mantel depth)	491/8"	45½"	
Ember Protection (centered in front of insert)	35" W x 16" D 33" W x 16" D		
Minimum Fireplace Opening	35½" W x 26" H x 19" D	33½" W x 22½" H x 16½" D	
Minimum to Side Walls (centered on insert)	53"	51"	

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your stove.

DVI-HT MAIDSTONE WILLOUGHBY KILLINGTON
3" intake, 3" exhaust
Continuous pilot
2-stage ceramic
On-Off-Thermostat
Optional
Included
Optional
Included
Included
N/A
Included
Yes
185
215
1,500 sq. ft.
13,000 to 33,000
12,000 to 33,000
82% NG 80% LP
74.5% NG 71.1% LP
67.1% NG / LP
39⁵⁄e"
27½" W x 14" D
28½" W x 20" H x 16½" D
421/2"

- (1) Shipping weight includes facade and small surround.
- (2) EnerGuide is a Government of Canada rating system that provides consumers with comparative information on the energy performance of energy-using products sold in Canada. For more information on the EnerGuide Program, please go to the EnerGuide Web site at: http://oee.nrcan.gc.ca/energuide/index.cfm
- (3) Steady state efficiencies vary dependent upon installation, venting configuration, altitude, gas values, and other installation variables.
- (4) Heating capacity is an approximation dependent upon floor plan, ceiling height, house construction, venting configuration, heat loss, and geographic location of home.
- (5) All measurements are taken from the closest surface of the unit. Clearances in this catalog are for reference only. Refer to Owner's Manual for exact specifications prior to installation.



EnerGuide is a Government of Canada rating system that provides consumers with comparative information on the energy performance of energy-using products sold in Canada.

For more information on the EnerGuide Program, please go to the EnerGuide web site at: http://oee.nrcan.gc.ca/energuide/index.cfm

Hearthstone Quality Home Heating Products, Inc., warrants all its gas products to the original purchaser for the lifetime of the appliance to be free from defects in material and workmanship, with certain limitations as defined in our Limited Lifetime Warranty policy. See your Hearthstone dealer for complete details and a copy of our warranty policy.

Hearthstone Sterling is a registered trademark of Hearthstone Quality Home Heating Products, Inc.





www.hearthstonestoves.com 802.888.5235



Hearthstone Quality Home Heating Products 317 Stafford Avenue Morrisville Vermont 05661 USA

