

Free Standing Gas Stove  
Model FDV200/FV200

New FOR  
2006



Vented Gas Stove





30 YEARS • 1976 - 2006

*The ultimate in design, engineering & quality*



The unit illustrated is the FDV200PN Free Standing Direct Vent Gas Stove Pedestal Model, LOGC200 Cast Split Oak Log Set with glowing embers, FDV200RL Refractory Brick Liner, and F200ADDX Arch Door Deluxe.

# The Ultimate in Free Standing Gas Stoves for New Home Construction or Renovation

Your best choice for installation anywhere throughout your home.

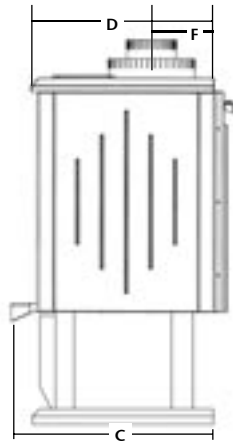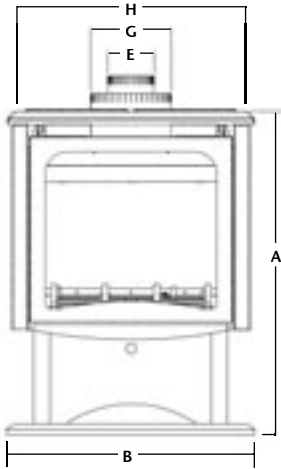

A	28 1/2"
B	21 11/16"
C	17 1/2"
D	15"
E	4" diameter
F	5 1/8"
G	7" diameter
H	21 5/8"

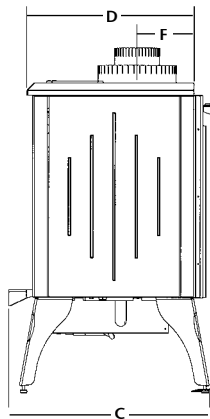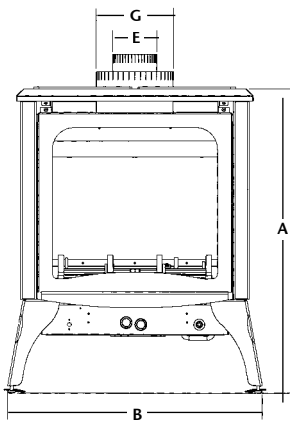

A	27 1/8"
B	23 1/4"
C	17 1/2"
D	15"
E	4" diameter
F	5 1/8"
G	7" diameter



With a direct vent appliance you can vent either through the side wall above the unit or straight up through the roof.

The model illustrated is the FDV200N Leg Model, with LOGC200 Log Set, and FDV200RL Brick Liner.

The FV200 B-Vented model (4" B-Vent) is particularly well suited for replacement of wood stoves as it can utilize the existing wood stove chimney. The unit has a spill safety switch, which will shut down the appliance in case of a blocked flue or downdraft occurs.

The FDV200 Direct Vent Model provides sealed combustion where it draws outside air for combustion. This model can be vented either horizontally or vertically.

### Minimum clearances to combustibles:

FDV200	FV200	
6"	7 1/2"	from side of unit
3"	3"	from back of unit
3"	3"	from side of unit in corner

### Alcove installation:

30"	depth (max.)
56"	height (min.)
53"	width (min.)

	Model	BTU-Input	Gas	Efficiency	FE(P4.1-02)
Direct Vent	FDV200N/ FDV200PN	30,000 - 20,000	Natural	77%	60.3%
	FDV200LP/ FDV200PLP	26,000 - 21,000	Propane	78%	63.6%
B-Vent	FV200N/ FV200PN	30,000 - 20,000	Natural	73%	68.3%
	FV200LP/ FV200PLP	32,000 - 25,000	Propane	76%	68.7%

### Features\*

- Stoves are available as a Pedestal or Leg model
- Millivolt valve system allows operation during a power failure with Hi-Low heat and flame adjustment
- Dual burner system, with Realistic Flame Pattern
- Heat radiating ceramic glass
- Mobile home approved - (Direct Vent Model Only)
- Approved for installation in a bedroom or bed sitting room
- Cast Oak Log Set with glowing embers\*

### Optional Features

- Heat activated blower with variable speed control
- Brick Refractory Liner (3 pieces)
- Remote Control on/off or Thermostat
- Millivolt Wall Mount Thermostat
- Programmable Millivolt Thermostat
- Arch Door Deluxe Overlay



Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.  
 Certification: The model FDV200 is certified for USA and Canada, Certified to: ANSI Z21.88a-2002/CSA-2.33-2002, Can/CGA 2.17-1991, CSA P4.1-02. Listed Direct Vent Gas Fired Free Standing Room Heater.  
 The model FV200 is certified to ANSI Z21.88b-2003/CSA 2.33b-2003, Can/CGA 2.17-1991



\*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

## Vented Gas Fireplace



Kingsman Fireplaces  
 2340 Logan Avenue  
 Winnipeg, Manitoba, Canada R2R 2V3  
 Phone: (204) 632-1962 Fax: (204) 632-1960  
 www.kingsmanind.com