




# IDV33/IDV36

DIRECT VENT GAS FIREPLACE INSERT

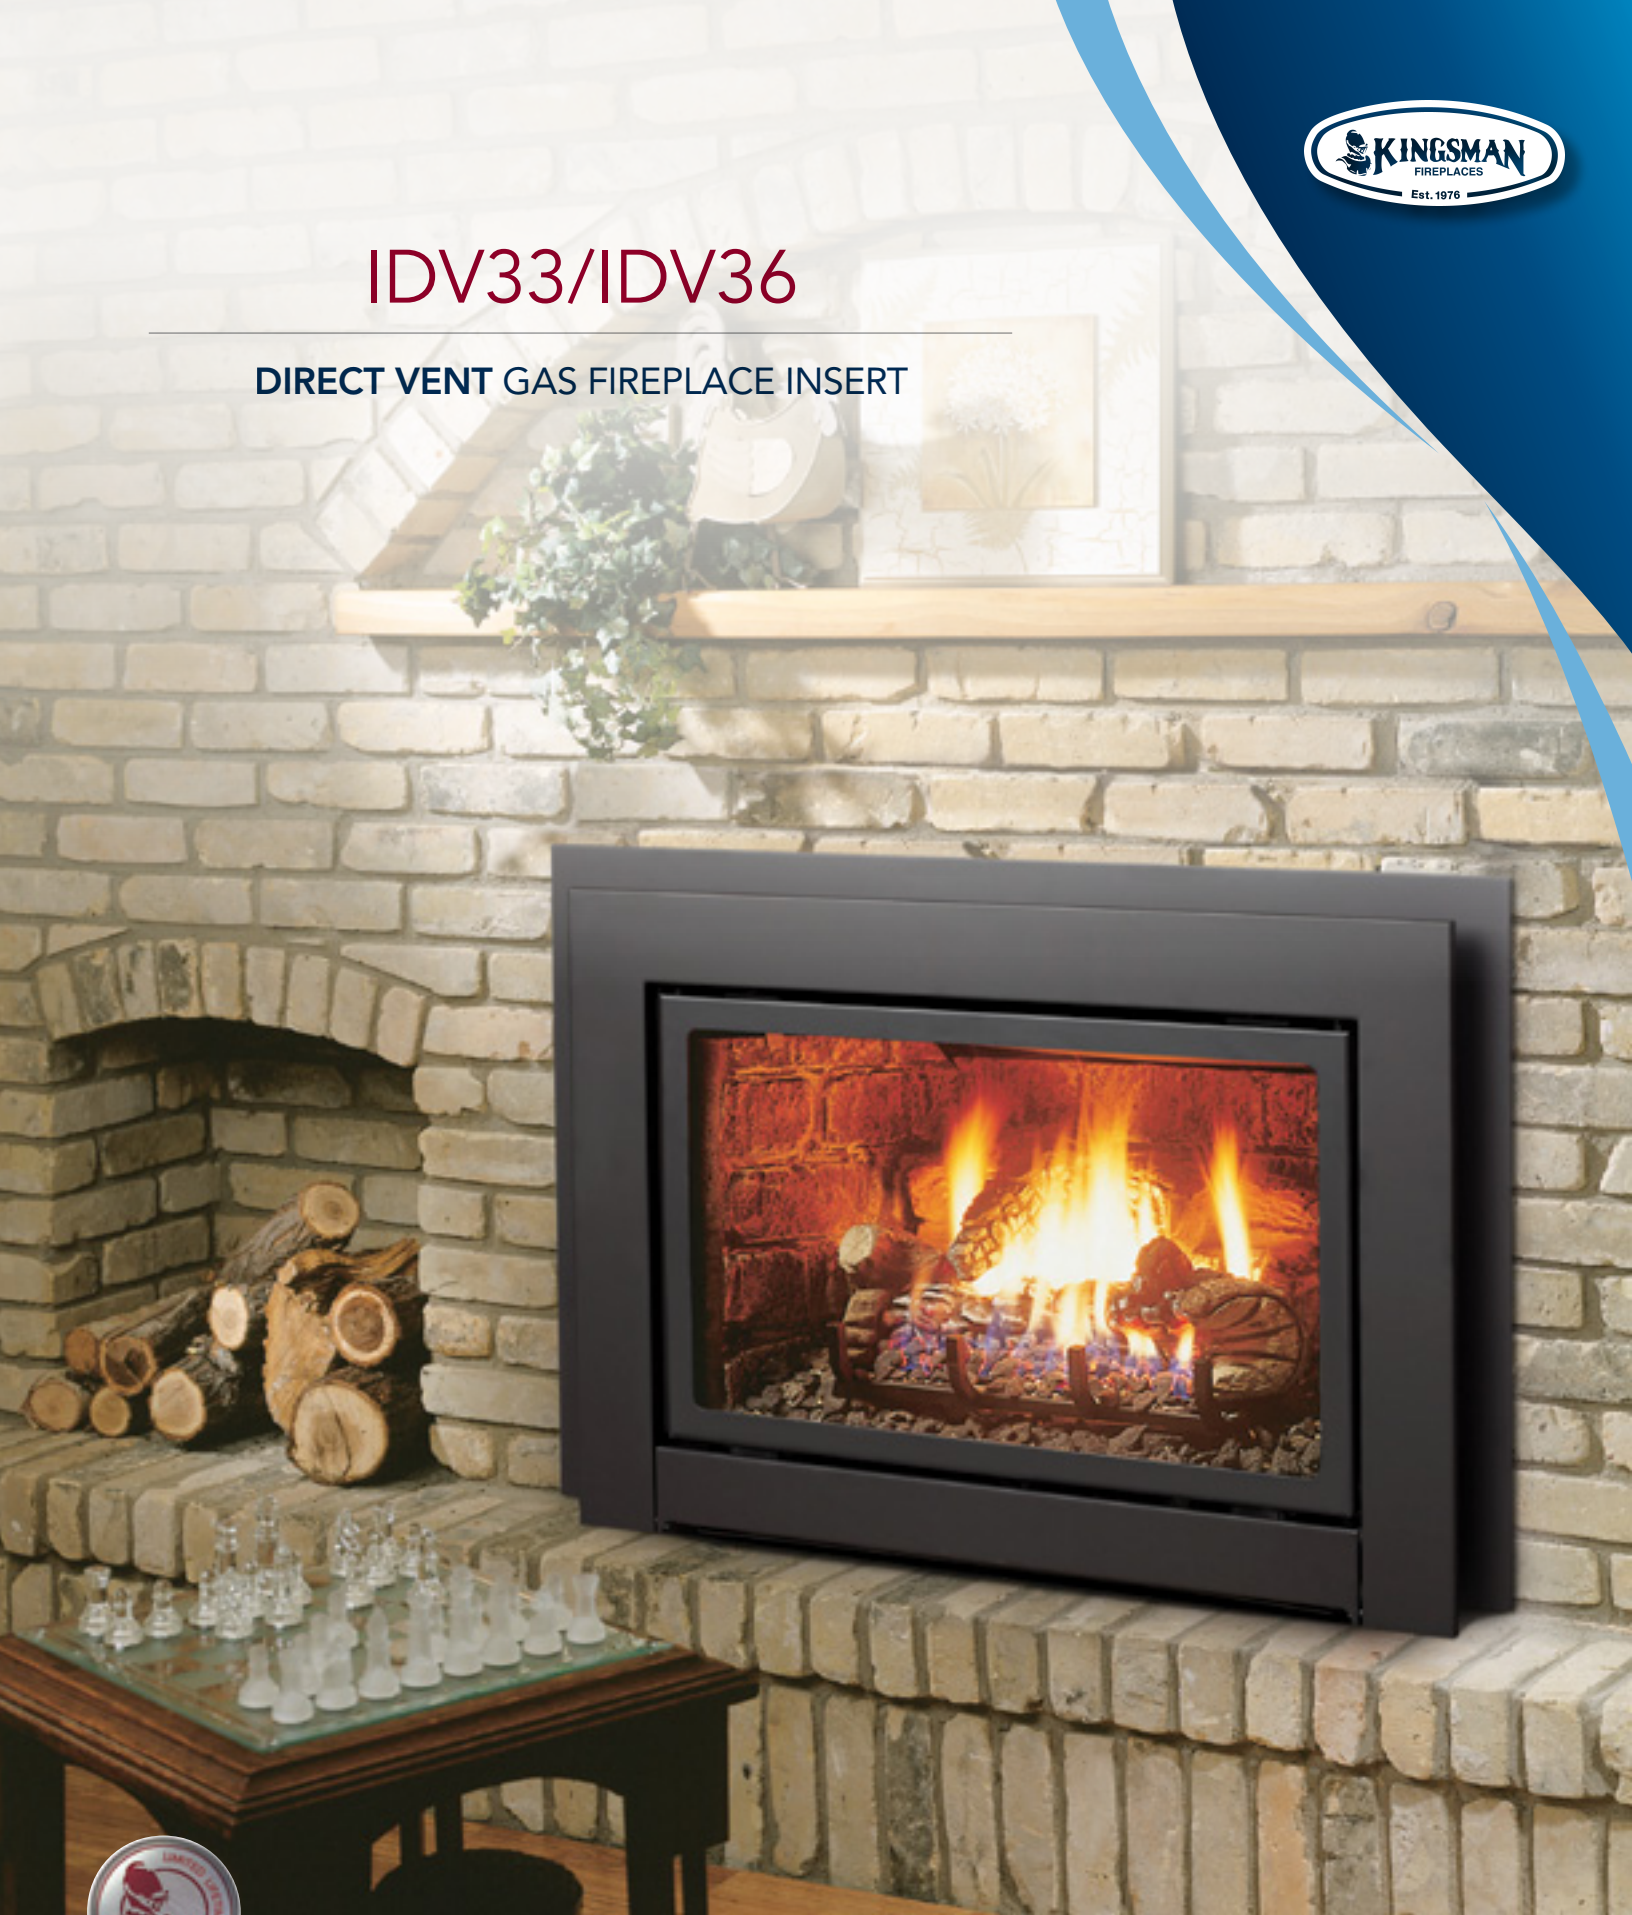

The Ultimate in Design, Engineering & Quality

This unit illustrated is a IDV33LP Direct Vent Fireplace Insert – Propane, LOGF35 Log Set – Fibre Split Oak, I33CVBL Clean View Kit – Black, I33SS1BL Surround for Clean View – Black, IDV33RL Refractory Brick Liner.

# Convert your wood burning fireplace to gas, for a new standard of warmth, beauty, safety and convenience.

<b>MODEL</b>	IDV33N / IDV36N	IDV33LP / IDV36LP
<b>FUEL</b>	NATURAL	PROPANE
<b>INPUT</b>	31,000 / 34,250 BTU	28,500 / 30,000 BTU
<b>LOW</b>	20,900 / 24,000 BTU	23,100 / 22,840 BTU
<b>OUTPUT</b>	23,250 / 25,688 BTU	21,375 / 22,500 BTU
<b>EFFICIENCY</b>	75%	75%
<b>FE (P.4.1-02)</b>	57.4% / 58.4%	57.9% / 59.9%

## STANDARD FEATURES\*

- Dual Burner with glowing embers
- Millivolt valve system allows operation during power failure with Hi-Low heat and flame adjustment
- Matchless Piezo Ignition
- Decorative Ash Bed
- Log Set - Fibre Split Oak\*
- Ceramic Glass
- On/Off Rocker switch
- Heat activated blower with variable speed control
- Bedroom and bed sitting room approval
- Mobile home, bedroom and bed sitting room approval

## OPTIONAL FEATURES\*

**Designer Clean View Kit** – Black, Pewter, Copper Vein

**Surrounds for Clean View** – Black, Copper Vein and Pewter

**Surround Picture Frame for Clean View** – Black

**Louver Kit** – Grills available in Black, Classic Series Black with Antique, Chrome, or Polished Brass accents

**Surrounds for Louver Kit** – Black

**Wall Mount Thermostat** – Standard On/Off or Programmable

**Remote Control** – On/Off, Thermostat, or Modulating Hi/Lo with Thermostat

**Overlay Arch Doors** – Deluxe, Top Half, Double Arch and Double Door

**Designer Doors** – Arch or Straight Doors with optional Antique, Chrome or Polished Brass trims

## MINIMUM FIREPLACE OPENING

	WIDTH	HEIGHT	DEPTH
IDV33	26 1/4"	21 3/8"	14 3/8"
IDV36	30 3/4"	25 5/8"	14 3/8"

## MINIMUM UNIT COVERAGE

IDV33	WIDTH	HEIGHT	IDV36	WIDTH	HEIGHT
IDV33 (Louvers)	34 1/2"	24 3/8"	IDV36 (Louvers)	39"	28 3/4"
IDV33 (Clean View*)	32 3/4"	22 3/4"	IDV36 (Clean View*)	37 1/4"	27"

\*Back Frame Dimension of Clean View Kit

## LOUVER KIT AND SURROUND SIZES

IDV33	WIDTH	HEIGHT	IDV36	WIDTH	HEIGHT
I33LK (Louver Kit)	34 1/2"	24 3/8"	I36LK (Louver Kit)	39"	28 3/4"
I33S3426B (Surround)	34 1/2"	27"	I36S3931B	39"	32 3/8"
I33S4028B (Surround)	40"	28 3/4"	I36S4432B	44"	33 1/8"
I33S4430B (Surround)	44"	31 3/8"	I36S4436B	44"	35 5/8"
I33S4535B (Surround)	45"	35"	I36S4736B	47"	36"

## CLEAN VIEW AND SURROUND SIZES

IDV33	WIDTH	HEIGHT	IDV36	WIDTH	HEIGHT
I33CV (Clean View)	35 7/8"	24 1/4"	I36CV (Clean View)	40"	28 1/2"
I33SPF1	39 3/8"	29 1/8"	I36SS1	43 1/2"	30 1/4"
I33SSI	39 3/8"	26"			



Unit illustrated is a IDV36N Direct Vent Insert – NG, I36LK Louver Kit, LOGF36 Log Set – Fibre Split Oak, IDV36GBL Grill Kit – Black, IDV36RLT Refractory Brick Liner – Traditional



Unit illustrated is a IDV33LP Direct Vent Fireplace Insert – Propane, LOGF35 Split Fiber Oak Log Set, I33CVCV Clean View Kit – Copper Vein, I33SS1CV Surround for Clean View – Copper Vein, IDV33RL Refractory Brick Liner.



Unit illustrated is a IDV33LP Direct Vent Fireplace Insert – Propane, LOGF35 Split Fiber Oak Log Set – I33CVPW Clean View Kit – Pewter, I33SS1PW Surround for Clean View – Pewter, IDV33RL Refractory Brick Liner.



Kingsman Fireplaces, maintains a program of continuous testing, refinement and improvements of all its products. Some aspects of units shown here may be changed at any time without notice or obligation. Certification: The models IDV33 and IDV36 are certified for Canada/USA as a Vented Gas Fireplace Heater ANSI Z21.88-2009, CSA 2.33-2009, CGA 2.17-M91.

\*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue  
Winnipeg, Manitoba, Canada R2R 2V3  
Phone: (204) 632-1962 Fax: (204) 632-1960  
[www.kingsmanfireplaces.com](http://www.kingsmanfireplaces.com)