

SUMMIT INSERT

INSERT FOR LARGE SPACES


Heat Output Cord Wood

99,000 BTU

38,500 BTU EPA Test Fuel

EFFICIENCY (LHV)	80.4%
EMISSIONS	3.9 GM/HR.
LOG SIZE (MAX)	18-20 IN.
FIRBOX SIZE	3.0 CU.FT.
GLASS SIZE	151 SQ.IN.
WEIGHT	465 LBS.

For heating large spaces with an existing masonry fireplace, the Summit Insert is the solution. The first insert with patented Extended Burn Technology, the Summit provides ten full hours of controlled burning for a full night of wood-heated comfort. An efficient, clean-burning heat source, the Summit insert is easy to light, easy to use, and offers a large window that provides a clear view of the flame. With a variable speed fans, clean-glass airwash technology and heavy-gauge overbuilt construction, the Summit will provide many years of comfort and enjoyment.

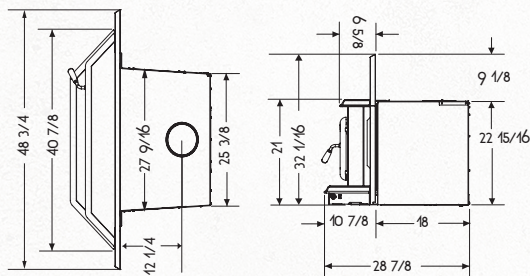

STANDARD FEATURES

Reliable, durable non-catalytic technology
Single-Lever Air Control
Airwash Technology for clear, clean glass
Multi-port combustion air injection system
Inside and outside combustion air capable
Floating firebox for extended stove life
Safe, easy front-to-back fuel loading
Metallic black finish
Cast iron warming shelf & ash lip
304 Stainless Steel Baffle, insulation cover, rails and flame shield
Boost air for easy lighting
2x80 cfm temperature-actuated variable-speed blowers
Extended Burn Technology (EBT2)
North-South loading

DESIGN OPTIONS

Arched door: choice of four finishes
Embossed Surround, Standard Size (50" x 32")
Embossed Surround, Oversize (54" x 34")
Flat Surround, Oversize (54" x 34")

