

# SUPER INSERT LE

PREMIUM CATALYTIC-FREE  
WOOD INSERT

**PACIFIC  
ENERGY**

CATALYTIC-FREE TECHNOLOGY

✓ MORE DURABLE

✓ MORE RELIABLE

✓ EASIER TO OPERATE



FOR HEATING MEDIUM SPACES



Heat Output Cord Wood

**72,000 BTU**

38,200 BTU EPA Test Fuel

Efficiency (HHV)	71.3%
Emissions	1.8 gm/hr.
Log Size (recommended)	16"
Log Size (max)	18"
Firebox Size	2.1 cu.ft.
Glass Viewing Area	122 sq.in.




Transform your drafty fireplace into an easy-to-light, easy-to-load reliable source of heat with the convenience of one-touch adjustable temperature control and breakthrough catalytic-free technology.

- EPA 2020 Certified
- Reliable, Durable Catalytic-Free Technology
- Extended Burn Technology (EBT)
- Air wash system for super clean ceramic glass
- Floating firebox for extended stove life
- 304 Stainless Steel Baffle, insulation cover, rails and flame shield
- Removable flue collar for easier installation
- Boost air for easy lighting
- Rich Metallic black finish
- Cast iron warming shelf & ash lip
- Inside and outside combustion air capable
- Single-Lever Air Control
- Two temperature-actuated variable-speed blowers
- 6" flue outlet
- North-South fuel loading



**PRODUCT DIMENSIONS**

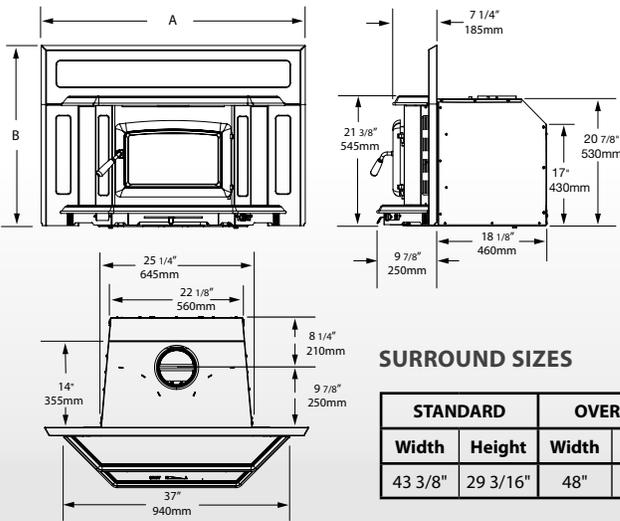

**SURROUND SIZES**


STANDARD		OVERSIZE	
Width	Height	Width	Height
43 3/8"	29 3/16"	48"	33"



Pacific Energy Traditional Inserts are customizable in your choice of door finishes. Available in Nickel, Metallic Black and Brushed Nickel.




**CLEARANCES TO COMBUSTIBLES**

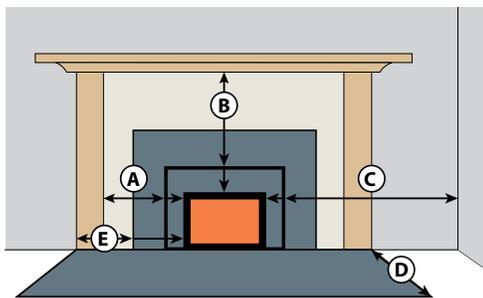

A	B	C	D (Can)	D (USA)	E
6"	12"	10"	18"	16"	8"

**MINIMUM FIREPLACE OPENING**

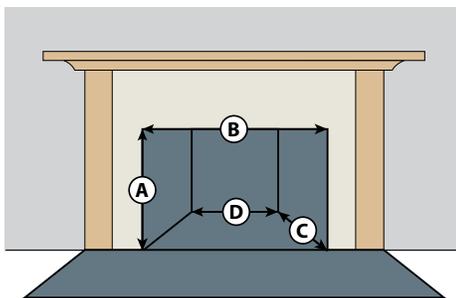

A	B	C	D
21"	26"	18 3/8"	22 1/2"



[pacificenergy.net](http://pacificenergy.net)

Pacific Energy is committed to continuous product improvement and innovation. As a result, appearance and specifications of the products featured in this brochure are subject to change without notice. For more information, please visit [pacificenergy.net](http://pacificenergy.net)